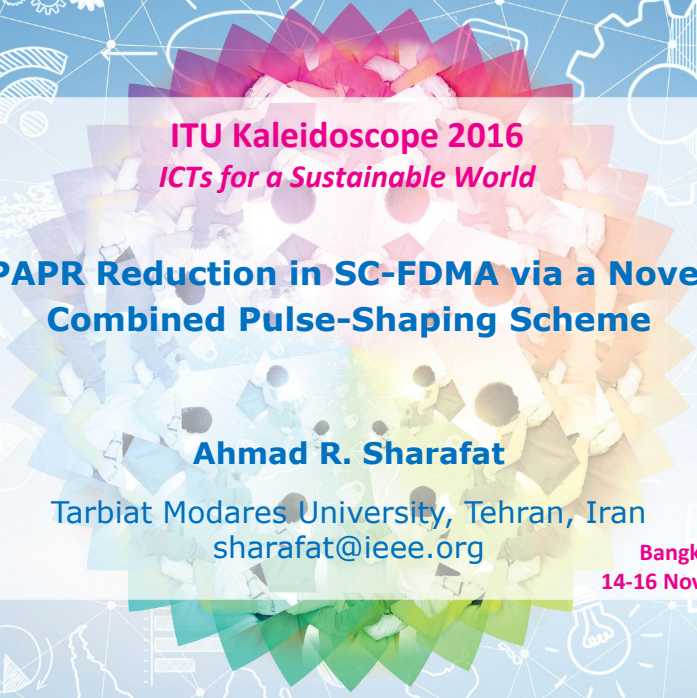


The logo is a large, colorful, multi-layered starburst or kaleidoscope shape in the center of the slide. It is composed of many overlapping, semi-transparent geometric shapes in various colors including purple, pink, red, orange, yellow, green, and blue. The background is a light blue gradient with white line art icons scattered throughout, including gears, a Wi-Fi symbol, a percentage sign, a dollar sign, a pie chart, a lightbulb, and a robot.

**ITU Kaleidoscope 2016**  
*ICTs for a Sustainable World*

**PAPR Reduction in SC-FDMA via a Novel  
Combined Pulse-Shaping Scheme**

**Ahmad R. Sharafat**

Tarbiat Modares University, Tehran, Iran  
[sharafat@ieee.org](mailto:sharafat@ieee.org)

**Bangkok, Thailand**  
**14-16 November 2016**

- 1 Introduction
- 2 SC-FDMA
- 3 Nyquist-I Pulse Shaping
- 4 Proposed Pulse Shaping Scheme
- 5 Simulation Results
- 6 Conclusions


# Introduction

# Introduction

- OFDM
- SC-FDMA
- Sub-Carrier Mapping
- PAPR Reduction
  - Linear
  - Non-Linear
- Our Pulse Shaping Scheme

# SC-FDMA

# SC-FDMA

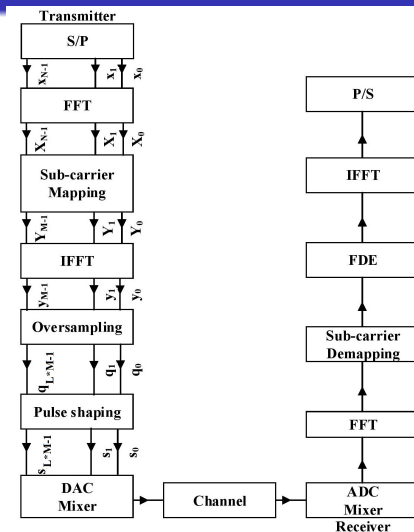

$$PAPR = \frac{\max_{0 \leq k \leq M \times L - 1} |s_k|^2}{E\{|s_k|^2\}}$$



# Nyquist-I Pulse Shaping

- Nyquist-I Pulse Shaping
- Different Versions of Nyquist-I Pulse Shaping
  - Raised Cosine
  - Root Raised Cosine
  - Parametric Linear Pulses
  - Parametric Exponential Pulses
  - Parametric Linear Combination Pulses



# Proposed Pulse Shaping Scheme

# Proposed Pulse Shaping Scheme I

- Combination of  $K$  pulse shaping methods

$$h(t) = \sum_{i=1}^K a_i h_i(t)$$

$$\text{s. t. } \sum_{i=1}^K a_i = 1$$

- Solving the problem for  $K = 3$
- Optimization problem


$$\min_{\mu, \nu} |h(t_1)| \times |h(t_2)|$$

$$\text{s. t. } |h(t_1)| > |h(t_2)|$$

where

$$h(t) = \mu h_{\text{PEP}}(t) + \nu h_{\text{PLP}(2)}(t) + (1 - \mu - \nu) h_{\text{PLP}(1)}(t)$$

# Proposed Pulse Shaping Scheme II

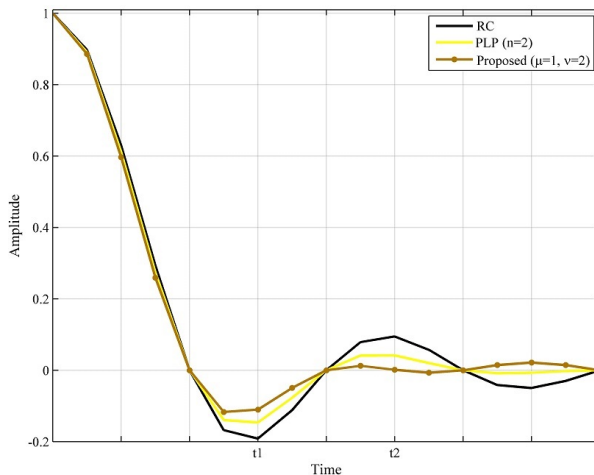

Impulse response of RC, modified PLP and our scheme.


# Simulation Results

# Simulation Results I

## Simulation Parameters


| Parameter                    | Value       |
|------------------------------|-------------|
| No. of subcarriers           | 512         |
| No. of used subcarriers      | 128         |
| Sampling frequency           | 10 MHz      |
| Oversampling factor          | 4           |
| Roll-off factor ( $\alpha$ ) | 0.22        |
| Sub-carrier mapping          | interleaved |

# Simulation Results I

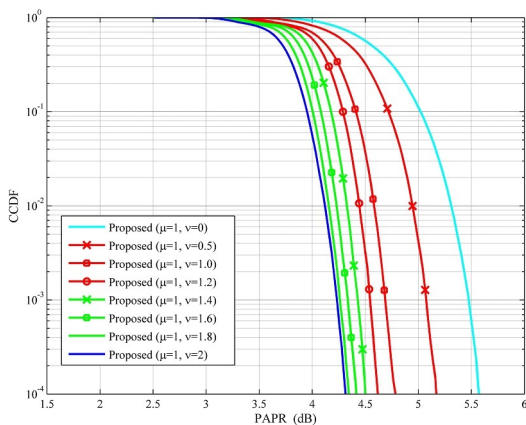


CCDF of PAPR for SC-IFDMA with QPSK for  $\mu = 1$  and  $\nu \in [0, 2]$ .

# Simulation Results II

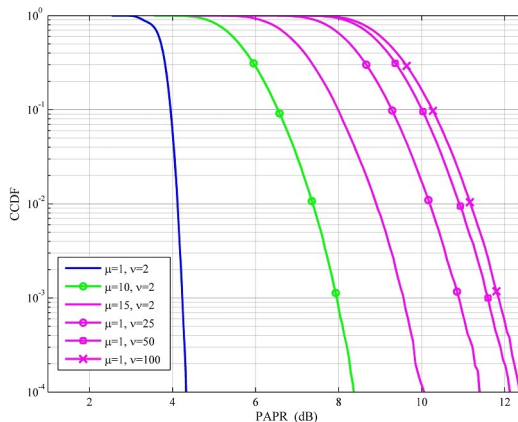

CCDF of PAPR for SC-IFDMA with QPSK for  $\mu = 1$  and  $v \in [2, 100]$


## Simulation Results III

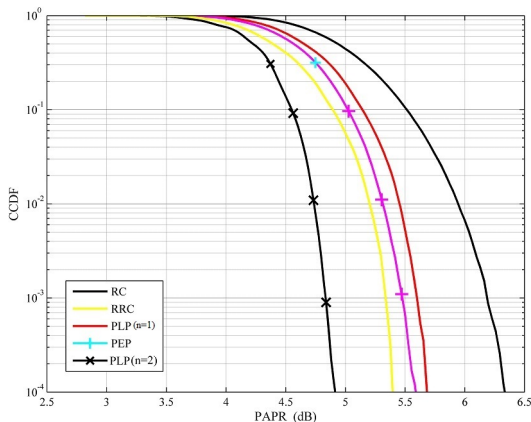

CCDF of PAPR for SC-IFDMA with QPSK via different schemes.




# Simulation Results IV

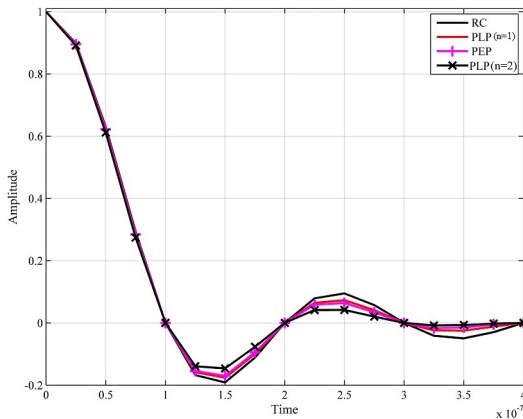


Impulse response of RC, PLP, PEP and modified PLP schemes.

# Simulation Results V

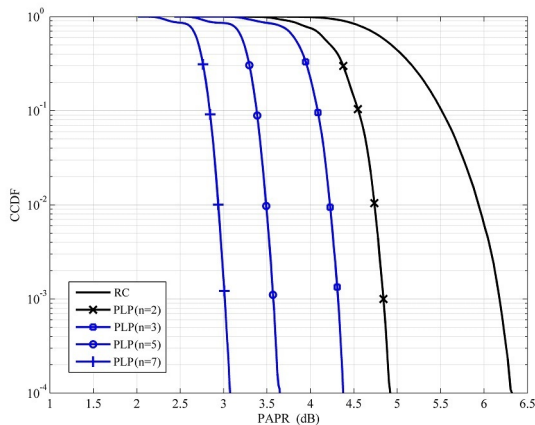


CCDF of PAPR for SC-IFDMA with QPSK via RC and modified PLP.

# Simulation Results VI

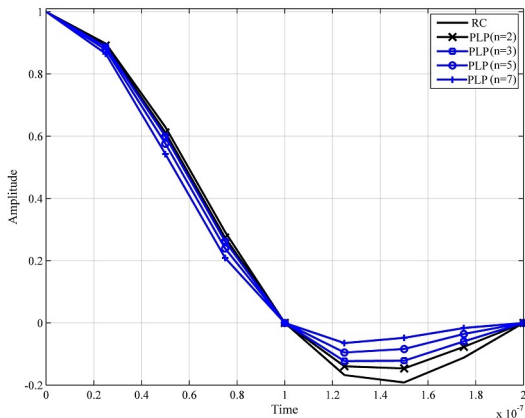


Impulse response of the RC and modified PLP schemes.

# Simulation Results VII

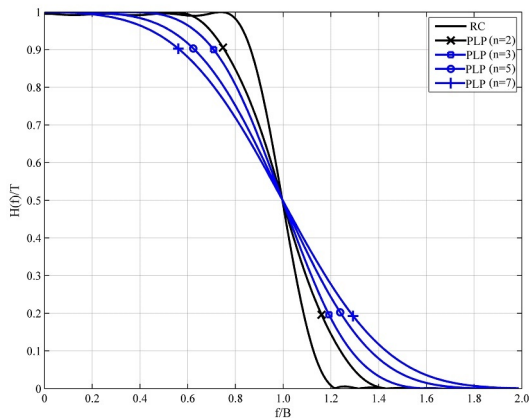


Frequency response of RC and modified PLP schemes.

# Simulation Results VIII

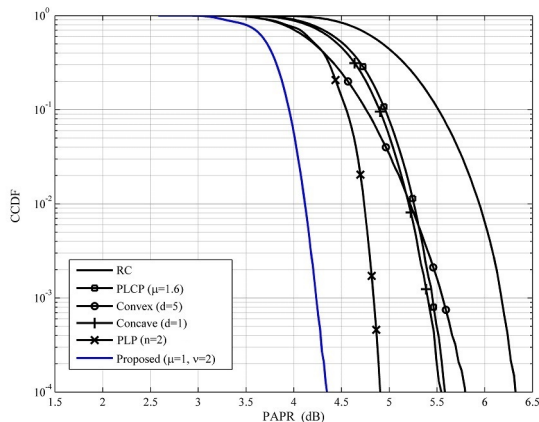

CCDF of PAPR for SC-IFDMA with QPSK different schemes.

# Simulation Results IX

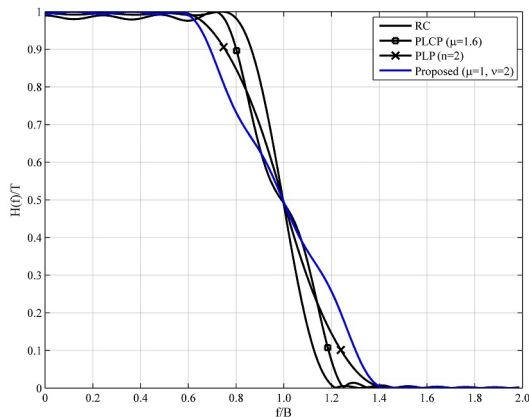

Frequency response of RC, PLCP, modified PLP, and our schemes.

# Simulation Results I

Required time to generate a transmit string in different pulse shaping schemes (parallel filters)

| Pulse Shaping                        | SC-IFDMA        |                  |
|--------------------------------------|-----------------|------------------|
|                                      | QPSK( $\mu s$ ) | 16QAM( $\mu s$ ) |
| RC                                   | 643.74          | 720.79           |
| RRC                                  | 644.73          | 722.58           |
| PLP                                  | 637.06          | 718.92           |
| PEP                                  | 643.56          | 717.96           |
| PP ( $n = 2$ )                       | 637.44          | 719.50           |
| PLCP ( $\mu = 1.6$ )                 | 687.09          | 755.12           |
| Proposed ( $\mu = 1$ and $\nu = 2$ ) | 710.26          | 774.42           |

# Simulation results I

Required time to generate a transmit string in different pulse shaping schemes (combined filters)

| Pulse Shaping                        | SC-IFDMA       |                 |
|--------------------------------------|----------------|-----------------|
|                                      | QPSK( $\mu$ s) | 16QAM( $\mu$ s) |
| RC                                   | 643.74         | 720.79          |
| RRC                                  | 644.73         | 722.58          |
| PLP                                  | 637.06         | 718.92          |
| PEP                                  | 643.56         | 717.96          |
| PP ( $n = 2$ )                       | 637.43         | 719.50          |
| PLCP ( $\mu = 1.6$ )                 | 637.39         | 719.23          |
| Proposed ( $\mu = 1$ and $\nu = 2$ ) | 645.31         | 720.59          |



# Simulation results

Average values and variances of PAPR for different pulse shaping schemes

| Pulse Shaping        | QPSK    |            | 16QAM   |            | 64QAM   |            |
|----------------------|---------|------------|---------|------------|---------|------------|
|                      | $\beta$ | $\sigma^2$ | $\beta$ | $\sigma^2$ | $\beta$ | $\sigma^2$ |
| RC                   | 4.45    | 0.11       | 5.49    | 0.32       | 5.76    | 0.32       |
| RRC                  | 3.53    | 0.05       | 5.02    | 0.14       | 5.55    | 0.14       |
| PLP                  | 3.93    | 0.07       | 5.21    | 0.25       | 5.54    | 0.25       |
| PEP                  | 3.77    | 0.07       | 5.12    | 0.24       | 5.48    | 0.24       |
| PP ( $n = 2$ )       | 3.10    | 0.04       | 4.81    | 0.15       | 5.27    | 0.18       |
| PLCP ( $\mu = 1.6$ ) | 3.70    | 0.08       | 5.09    | 0.23       | 5.45    | 0.23       |
| Convex ( $d = 5$ )   | 3.90    | 0.16       | 4.99    | 0.23       | 5.39    | 0.21       |
| Concave ( $d = 1$ )  | 3.64    | 0.08       | 5.04    | 0.25       | 5.42    | 0.22       |
| Proposed             | 2.34    | 0.02       | 4.41    | 0.08       | 5.09    | 0.10       |

# Conclusions

## Conclusions

- We proposed a novel pulse shaping scheme to reduce PAPR in SC-FDMA systems, and compared its performance with other existing schemes via simulation
- The PAPR in our scheme is 2.11 dB, 1.08 dB, and 0.67 dB less than those in RC pulse shaping for QPSK, 16-QAM and 64-QAM respectively.

Thank You